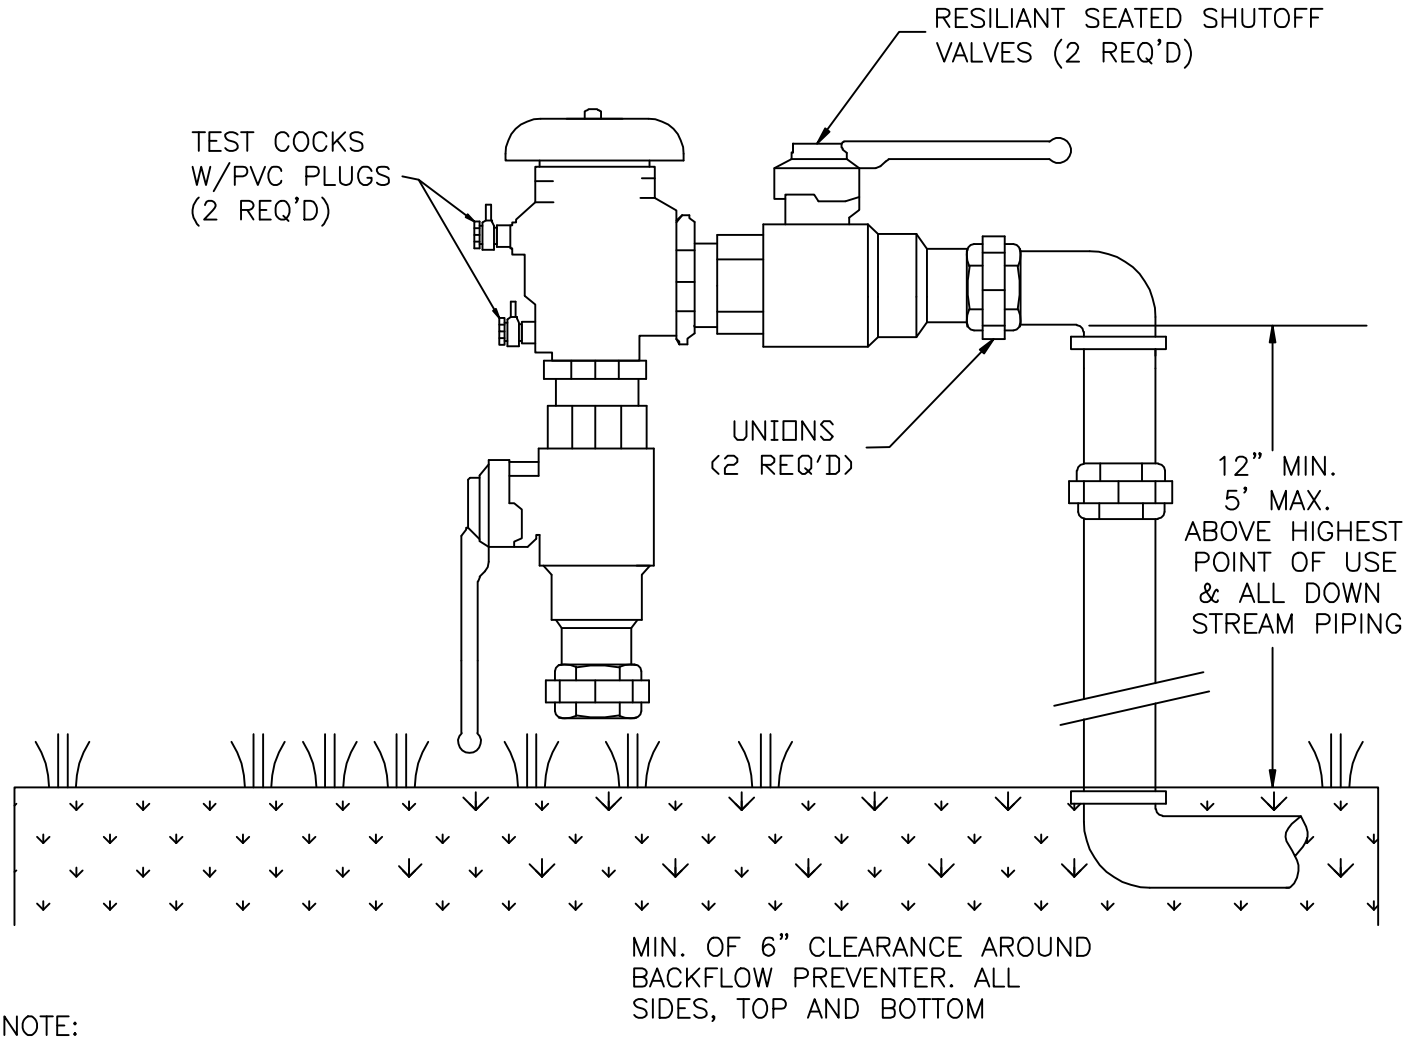

NOTE:

1. APPROVED PRESSURE VACUUM BREAKER ASSEMBLY MUST BE INSTALLED VERTICALLY, 12" MIN. – 5' MAX. ABOVE THE HIGHEST POINT OF USE AND ALL DOWN STREAM PIPING.
2. DESIGNED FOR BACK SIPHONAGE ONLY, NOT FOR BACK PRESSURE.
3. THOROUGHLY FLUSH LINES PRIOR TO INSTALLATION OF BACKFLOW PREVENTER.
4. IF A PVBA IS INSTALLED INDOORS, CONSIDERATION MUST BE GIVEN TO WATER LEAKAGE IF THE BACKFLOW PREVENTER FAILS (EXCESSIVE WATER SPILLAGE)
5. DO NOT INSTALL IN AN AREA SUBJECT TO FLOODING.
6. MUST BE PROTECTED FROM FREEZING CONDITIONS.
7. THE BACKFLOW ASSEMBLY SHALL BE A STATE APPROVED MODEL.
8. A PLUMBING PERMIT IS REQUIRED– PLEASE CONTACT LOCAL PLUMBING PERMIT CENTER.
9. MUST BE TESTED AFTER INSTALLATION AND YEARLY THEREAFTER BY WASHINGTON STATE CERTIFIED BACKFLOW ASSEMBLY TESTER. TEST RESULTS SHALL BE SENT TO THE CITY OF EDMONDS PUBLIC WORKS.

(ABOVE GROUND INSTALLATION ONLY)

Est. 1890

CITY OF EDMONDS

REVISIONS		STANDARD DETAIL		
APPROVED BY	DATE	**PRESSURE VACUUM BREAKER ASSEMBLY (PVBA) 2" AND SMALLER**		
		DATE 6/16/03	SCALE NTS	DWG NO. **E 7.17**