



PLACE SCORE MARKS EVERY 10'

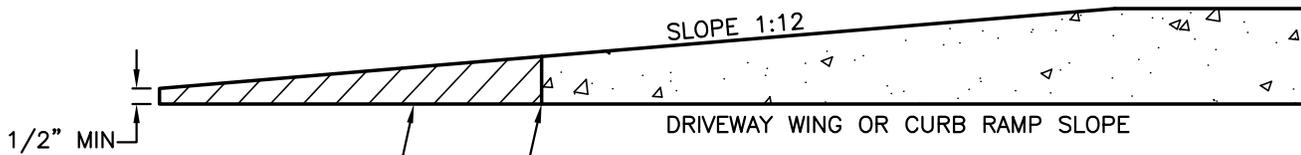

CONSTRUCT OUT OF HMA PAVEMENT

CONCRETE CURB SHALL BE NO LESS THAN 3" IN HEIGHT


EXTEND PAVEMENT 1.3' FROM THE FACE OF CURB IF NECESSARY TO SUPPORT EXTRUDED CURB

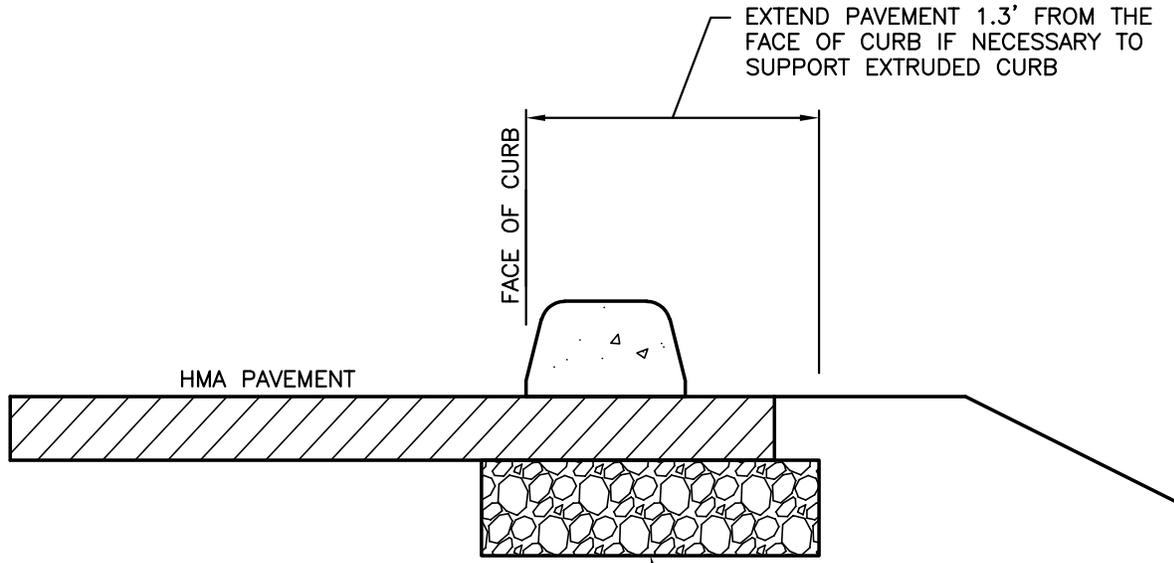

PLACE 6" COMPACTED 5/8" CSTC BELOW HMA EXTENSION

**NOTES:**

1. NOT TO BE USED IN RIGHT-OF-WAY EXCEPT TO REPAIR EXISTING EXTRUDED CURB, AS APPROVED BY CITY ENGINEER.
2. BONDING AGENT IS THE ONLY ATTACHMENT METHOD TO BE USED BETWEEN HMA AND EXTRUDED CURB.
3. CONCRETE SHALL BE AIR-ENTRAINED CLASS 3000 PER WSDOT STANDARD SPECIFICATIONS.
4. NATIVE AND GRAVEL SUBGRADE SHALL BE COMPACTED TO A MINIMUM OF 95% MAX DENSITY.



**CITY OF EDMONDS**  
PUBLIC WORKS  
DEPARTMENT

**CONCRETE  
EXTRUDED CURB**

APPROVED BY: R. ENGLISH

REVISION DATE  
DECEMBER 2018

STANDARD  
DETAIL  
TR-522