


	MIN.	MAX.
A	1 5/8'	2 3/8'
B	5/8'	1 1/2'
C	7/16'	3/4'
D	7/8'	1 7/16'

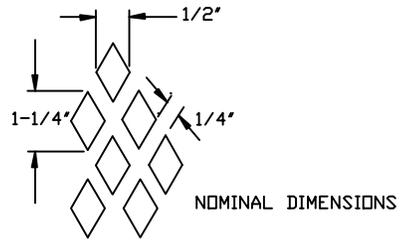


TRACTION GRID PATTERN  
TACTILE WARNING TEXTURING  
DETAIL A

NOTE:

1. DETECTABLE WARNING PATTERNS SHALL BE YELLOW IN COLOR, SET AND SECURED IN CONCRETE, AND SHALL MEET THE DIMENSIONS AND SPACING SHOWN.
2. TACTILE WARNING TEXTURING SHALL BE DONE WITH AN EXPANDING METAL GRATE PLACED AND REMOVED FROM WET CONCRETE TO LEAVE A DIAMOND PATTERN AS SHOWN. THE LONG AXIS OF THE DIAMOND PATTERN SHALL BE PERPENDICULAR TO THE CURB. GROOVES SHALL BE 1/8" DEEP AND 1/4" WIDE
3. ALL CONCRETE SURFACES SHALL HAVE A LIGHT BROOM FINISH.
4. DETECTABLE WARNING PATTERNS (TRUNCATED DOMES) SHALL BE REQUIRED ON ALL PUBLIC STREETS WITH A CURB RETURN AND PRIVATE STREETS SERVING FIVE OR MORE LOTS. TRACTION GRID (DIAMONDS) TO BE USED AS INDICATED.
5. FOR NON-INTERSECTION CURB RAMPS ON PRIVATE PROPERTY, THE STANDARD DIAMOND PATTERN MAY BE USED AS INDICATED IN DETAIL A.

CITY INSPECTION REQUIRED ON FORM WORK PRIOR TO POUR.  
ACCESSIBLE RAMP SHALL BE POURED SEPARATELY  
FROM CURB AND GUTTER.



CITY OF EDMONDS

REVISIONS		STANDARD DETAIL		
APPROVED BY	DATE			
D. GEBERT	03/24/05	<b>RAMP DETAIL FOR TYPE 2 RAMPS</b>		
D. GEBERT	06/27/05			
D. GEBERT	04/2/07			
DATE	7/24/01	SCALE	NTS	DWG NO. <b>E2.22</b>