


PLACE SCORE MARKS EVERY 10'

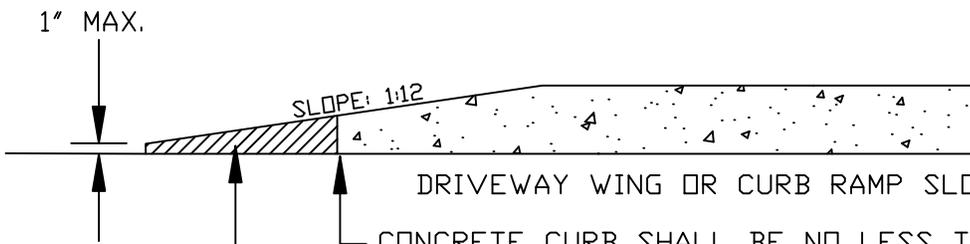


DRIVEWAY WING OR CURB RAMP SLOPE

CONCRETE CURB SHALL BE NO LESS THAN 3" IN HEIGHT


CONSTRUCT OUT OF ACP PAVEMENT

NOTE: NOT TO BE USED IN R.O.W. EXCEPT TO REPAIR EXISTING EXTRUDED CURBING.

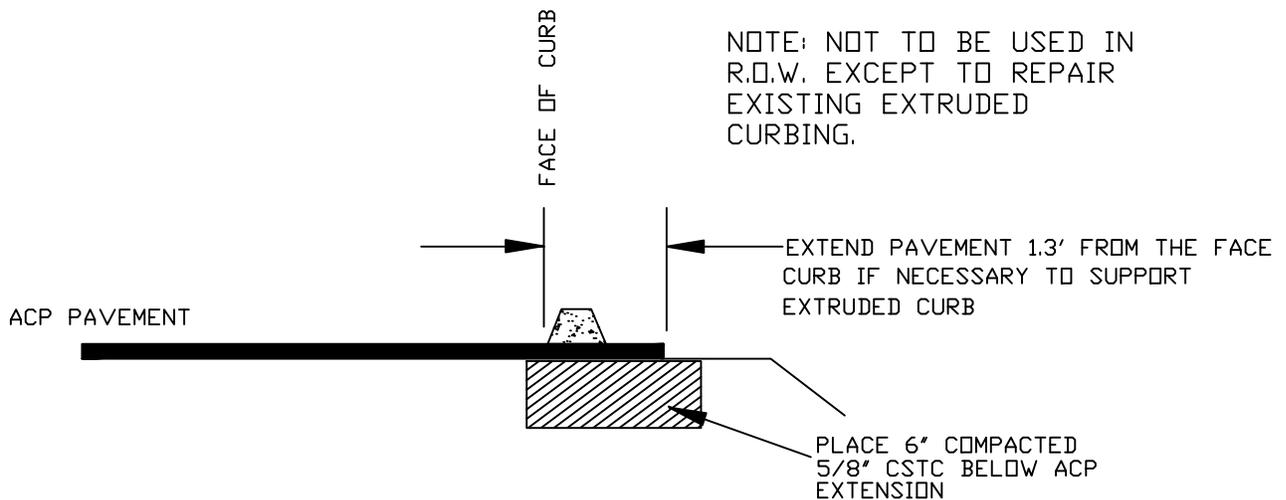

EXTEND PAVEMENT 1.3' FROM THE FACE CURB IF NECESSARY TO SUPPORT EXTRUDED CURB

PLACE 6" COMPACTED 5/8" CSTC BELOW ACP EXTENSION



CITY OF EDMONDS

| REVISIONS | |
|-------------|----------|
| APPROVED BY | DATE |
| D. GEBERT | 06/29/05 |
| | |
| | |

STANDARD DETAIL

CONC. EXTRUDED CURB

| | | | | | |
|------|---------|-------|-----|---------|-----|
| DATE | 7/24/01 | SCALE | NTS | DWG NO. | E27 |
|------|---------|-------|-----|---------|-----|