



DRIVEWAY APPROACH (WITHOUT CURB)

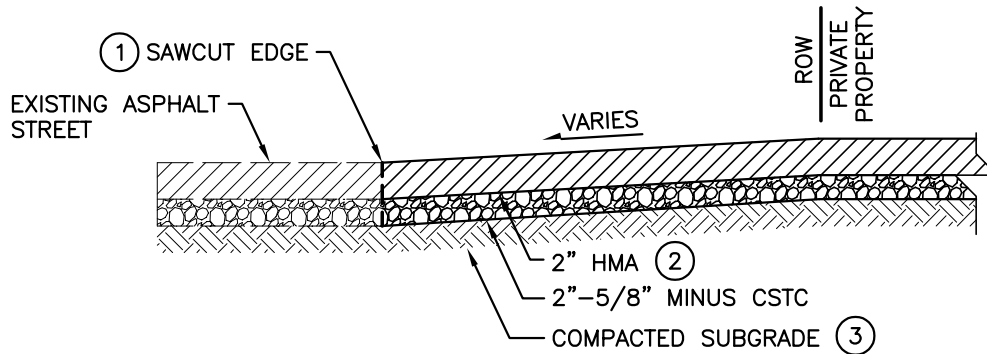

SECTION A-A

NOTES:

- ① SAWCUT AND USE TACK COAT BETWEEN ROAD TO DRIVEWAY APPROACH JOINT. SEAL JOINT WITH AR4000 SEALER.
- ② DRIVEWAY APPROACH TO BE 2" HMA CLASS 1/2" PG 58H-22.
- ③ SUBGRADE SHALL BE COMPACTED TO 95% MAXIMUM DENSITY.
- ④ 10' EDGE RADIUS.
- ⑤ HMA SHALL BE PLACED FROM EDGE OF EXISTING STREET, A MINIMUM DISTANCE OF 20-FT OR TO PROPERTY LINE, WHICHEVER IS GREATER.
- ⑥ DRIVEWAY WIDTH TO BE MINIMUM 12'.



CITY OF EDMONDS
PUBLIC WORKS
DEPARTMENT

**DRIVEWAY APPROACH
TYPE VI**

APPROVED BY: R. ENGLISH

REVISION DATE
SEPTEMBER 2023

STANDARD
DETAIL
TR-546